


## Han FireWire module, male for patch cord

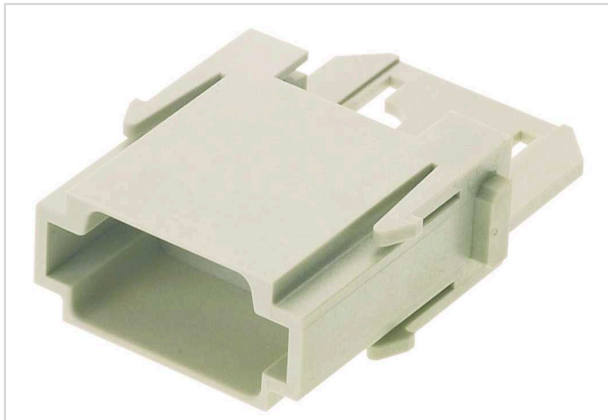

Part number	09 14 001 4611
Specification	Han FireWire module, male for patch cord
HARTING eCatalogue	<a href="https://b2b.harting.com/09140014611">https://b2b.harting.com/09140014611</a>

### Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® FireWire module
Description of the module	for patch cable

### Version

Gender	Male
--------	------

### Technical characteristics

Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥500

### Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e



Pushing Performance

## Material properties

REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076

## Commercial data

Packaging size	1
Net weight	17.66 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440218 Module for industrial connectors (data)